


Bandolero Ballast

3. **BALLAST:** A maximum of two (2) blocks of lead are permitted on either the left or right sides of the car in the diagonal position. A maximum of two (2) 12" blocks or four (4) 6" blocks of lead are permitted on either the left or the right side of the drivers seat for a total of eight (8) 12" blocks or a total of four (4) 12" & eight (8) 6" blocks of lead (see diagram below). There must be an equal number of ballast on both the right & left sides of the car, of equal weight (the position of the blocks of lead must be a mirror image from left to right). For example; if there are two blocks of lead on the left side of the car, there must also be two blocks of lead on the right side of the car in the same position of equal amount.

The only permitted sizes of ballast that may be used are as follows:

1. 12" long x 2-1/2" wide x 1-1/2" deep (aprox. 20 lbs.)
2. 12" long x 2-1/2" wide x 3/4" deep (aprox. 10 lbs.)
3. 6" long x 2 1/2" wide x 1 1/2" deep (aprox. 10 lbs.)
4. 6" long x 2 1/2" wide x 3/4" deep (aprox. 5 lbs.)
5. 12" long x 1 1/4" wide x 1 1/2" deep (approx. 10 lbs)
6. 12" long x 1 1/4" wide x 3/4" deep (approx. 5 lbs)

Mounting Ballast - The blocks of lead must be bolted directly through the floorpan and chassis sub-frame (square tube) as shown in the diagram. The ballast must be secured with a minimum of two (2) 3/8" bolts, washers and locking nuts for each stack of lead. The blocks of lead may not be stacked higher than 3" from the square tube. The lead may not be encased in anyway. Ballast may not be added in any other location or by any other method, including steel shot or any other material in the frame rails, roll cage or bumpers. All mounting of the ballast is subject to

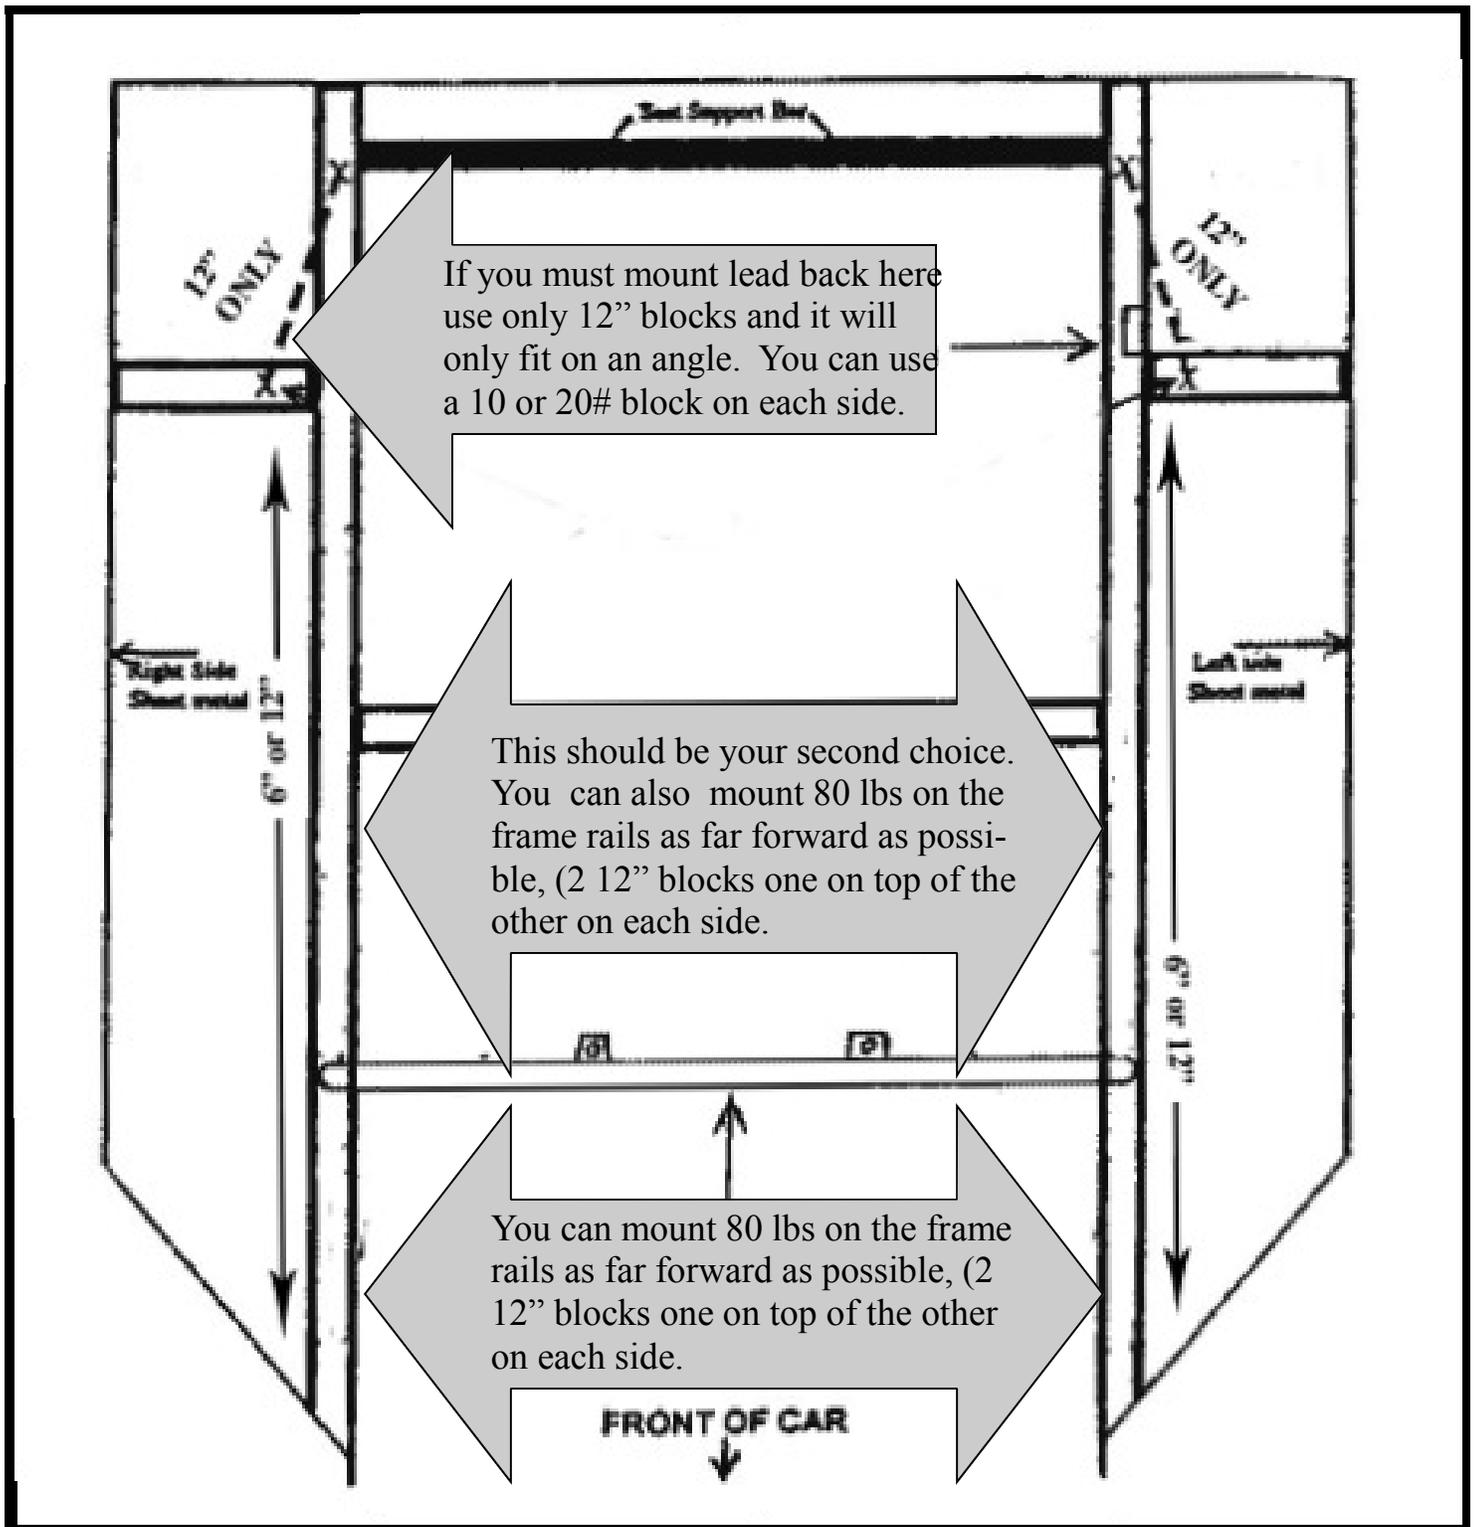

Weight is usually mounted as far forward as possible, especially for a road course.

The sizes listed in the INEX rulebook must be used. Be sure to use two 3/8" bolts, washers and locknuts for each stack of lead.

Lead is not cheap, usually about \$2 per pound.